


NIGHT BREAKER® LED
SMART

H4-LED / H19-LED | 12V
64193DWNBSM

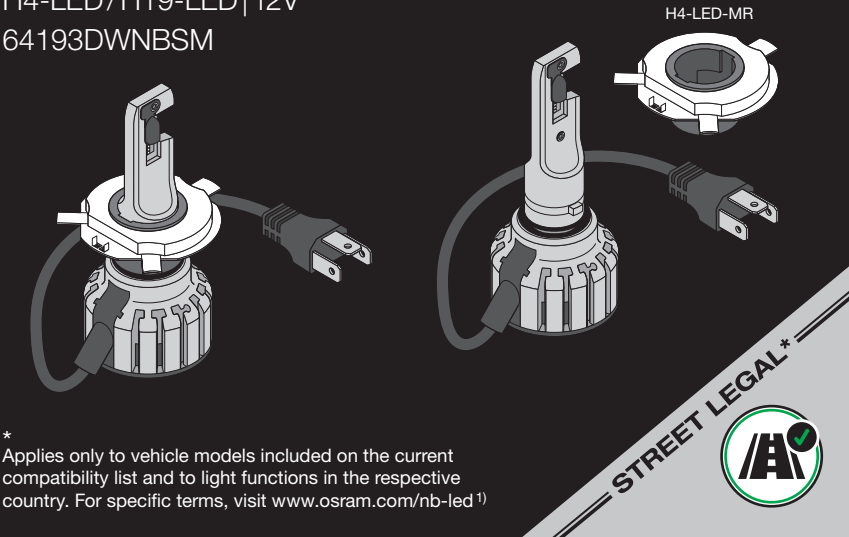

* Applies only to vehicle models included on the current compatibility list and to light functions in the respective country. For specific terms, visit www.osram.com/nb-led¹⁾

NIGHT BREAKER® LED
SMART

H4-LED / H19-LED | 12V
64193DWNBSM

<http://www.osram.com/am-installation>

For questions regarding maintenance or technical problems, please contact OSRAM customer service via automotive-service@osram.com¹²⁾



OSRAM Prosperity Co. Ltd
Room 4007-4009 Office Tower
Convention Plaza
1 Harbour Road
Wanchai, Hong Kong

www.osram.com/am-guarantee

C15122315
G15142701
21.07.25

OSRAM GmbH
Nonnendammallee 44
13629 Berlin, Germany
automotive-service@osram.com
www.osram.com

H4-LED

H4-LED-MR (Mounting Ring) **

160mm
84mm

H19-LED

LEDDriving® ADAPTER 64193DA19**

** Depending on your vehicle model, please use H4-LED-MR (Mounting Rings) or ADAPTER (64193DA19) for the following installation options.²⁾

Option 1a

Option 1b

Option 2a/2b

LOW BEAM / HIGH BEAM

OFF

Option 1a

Option 1a

Option 1a

Option 1a

Option 1a

Option 1a

Option 1a

Option 1a

Option 1a

TEST

Option 1b

Option 1b

Option 1b

Option 1b

Option 1b

Option 1b

Option 1b

Option 1b

Option 1b

Option 1b

Option 1b

Option 1b

Option 1b

Option 1b

Option 1b

TEST

Option 2a/2b

Option 2a/2b

Option 2a/2b

Option 2a/2b

Option 2a/2b

Option 2a/2b

Option 2a/2b

Option 2a/2b

Option 2a/2b

Option 2a/2b

Option 2a/2b

Option 2a/2b

Option 2a/2b

Option 2a/2b

Option 2a/2b

TEST

