
Product Document



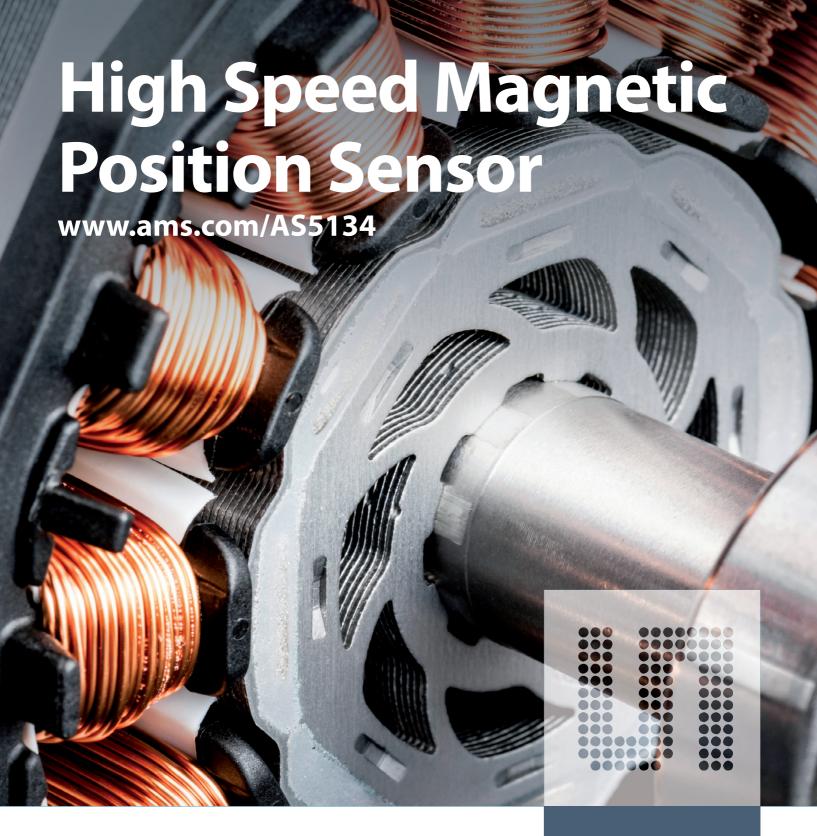

AS5134 – High Speed Magnetic Position Sensor

- Brushless DC motor control applications
- High speed, high precision
- Immunity to magnetic stray fields

We provide innovative analog solutions to the most challenging applications in sensor and sensor interfaces, power management, and wireless.



General Description


The AS5134 is a contactless magnetic rotary encoder for accurate angular measurement over a full turn of 360°. It is a system-on-chip, combining integrated Hall elements, analog front end and digital signal processing in a single device. To measure the angle, only a simple two-pole magnet, rotating over the center of the chip is required. The absolute angle measurement provides instant indication of the magnet's angular position with a resolution of 8.5 bit = 360 positions per revolution. This digital data is available as a serial bit stream and as a PWM signal.

In addition to the angle information, the strength of the magnetic field is also available as a 6-bit code. Data transmission can be configured for 1-wire (PWM), 2-wires (DCLK, DIO) or 3-wires (DCLK, DIO, CS). A software programmable (OTP) zero position simplifies assembly as the zero position of the magnet does not need to be mechanically aligned. A Power Down Mode together with fast startup- and measurement cycles allows for very low average power consumption.

Applications

- Contactless rotary position sensing
- Rotary switches (human machine interface)
- AC/DC motor position control
- Brushless DC motor position control

AS5134 Block Diagram

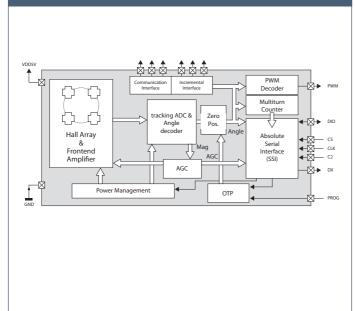

Features

- 360° contactless angular position encoding
- Two digital 360 step (8.5 bit) absolute outputs:
- Serial interface and
- Pulse width modulated (PWM) output
- User programmable zero position, sensitivity
- High speed: up to 82,000 rpm
- Direct measurement of magnetic field strength allows exact determination of vertical magnet distance
- Incremental outputs ABI quadrature: 90 ppr, step direction:
- 180ppr, fixed pulse width 360ppr
- BLDC Outputs UVW, selectable for 1,2,3,4,5,6 pole pairs
- Daisy-Chain mode for cascading of multiple sensors
- 9-bit multiturn counter
- Low power mode with fast startup
- Wide magnetic field input range: 20 80 mT
- Wide temperature range: 40° C to + 140° C
- Small Pb-free package: SSOP 20
- Fully automotive AEC-Q100, grade 1 qualified

Benefits

- Complete system-on-chip, no angle calibration required
- Flexible system solution provides absolute serial, ABI, UVW and PWM outputs
- Ideal for applications in harsh environments due to magnetic sensing principle
- High reliability due to non-contact sensing
- Robust system, tolerant to horizontal misalignment, airgap variations, temperature variations and external magnetic fields

www.ams.com products@ams.com © 11/2012 by ams Subject to change without notice

Headquarters

ams AG

Tobelbader Strasse 30, 8141 Unterpremstaetten, Austria Phone +43 3136 500-0 · Fax +43 3136 525-01



